


HIGHLANDER II

VERTICAL PLATFORM LIFT

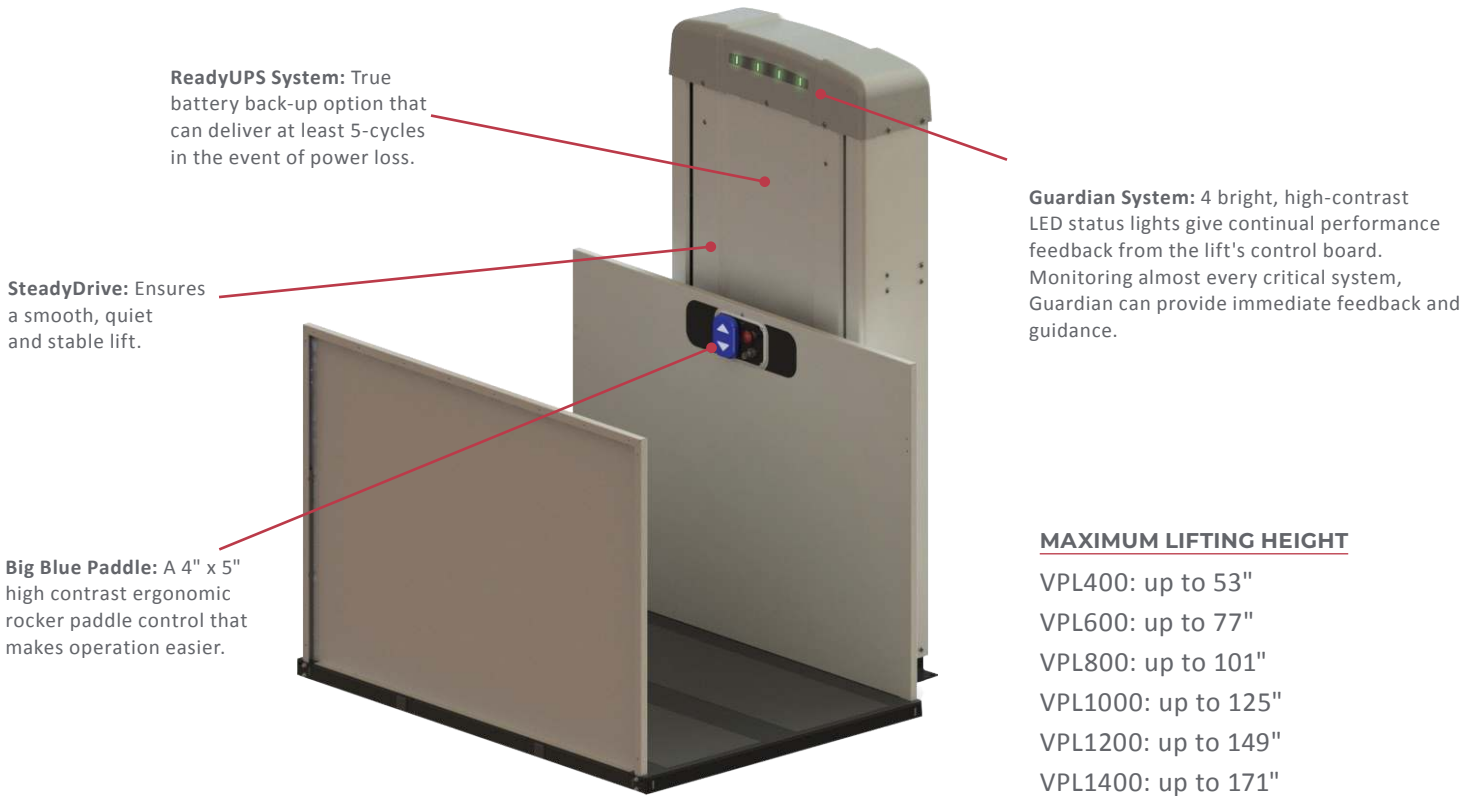

ReadyUPS System: True battery back-up option that can deliver at least 5-cycles in the event of power loss.

SteadyDrive: Ensures a smooth, quiet and stable lift.

Big Blue Paddle: A 4" x 5" high contrast ergonomic rocker paddle control that makes operation easier.

Guardian System: 4 bright, high-contrast LED status lights give continual performance feedback from the lift's control board. Monitoring almost every critical system, Guardian can provide immediate feedback and guidance.

MAXIMUM LIFTING HEIGHT

- VPL400: up to 53"
- VPL600: up to 77"
- VPL800: up to 101"
- VPL1000: up to 125"
- VPL1200: up to 149"
- VPL1400: up to 171"

VPL400-1400 PRODUCT SPECIFICATIONS

CAPACITY	750 lb	SPEED	10.4 FPM
DRIVE	<ul style="list-style-type: none"> - ACME screw - 90V 2/3 HP fully sealed DC gear motor 	POWER	115V AC 15 AMP circuit breaker
PLATFORM SIZES	<ul style="list-style-type: none"> - VPL400-VPL600: 36" x 48" clear platform - VPL800-VPL1400: 36" x 54" clear platform 	WARRANTY	3-year limited
CERTIFIED	<ul style="list-style-type: none"> - ETL listed - CSA B44.1/ASME A17.5 - Safety standard ASME A18.1 - Rated commercial and residential 	FEATURES	<ul style="list-style-type: none"> - 4" x 5" constant pressure paddle control - Seal-Kor powder coat with stainless steel hardware for outdoor use
SAFETY FEATURES	<ul style="list-style-type: none"> - Safety pan beneath platform - 4-LED indicators in top cap - Emergency stop button in platform - Overspeed brake - Overload protection - Interlocks for doors/gates - Manual lowering tool 	OPTIONS	<ul style="list-style-type: none"> - Battery backup UPS system - 36" or 42" platform gates with EMI interlock - Grab bar in platform - Fixed or auto-fold ramp - Fire-rated doors - Wired or wireless call/send controls - Lighted E-Stop with alarm - Key lock in platform - 3-stop with 3-button control panel



Harmar.com
800.833.0478

09OCT020 | MKT-000125 REV C

